
8706 / 8736 / 8737 XO 5400 / XO 5436 / XO 5437 CONCEALED THERMOSTATIC MIXING VALVE

FLOW RATES

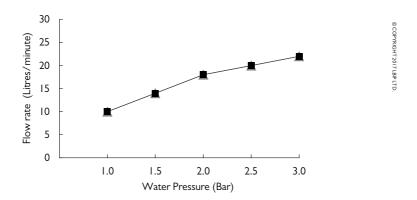

TYPICAL FLOW RATES

Flow rates shown are free flowing and may vary subject to restrictions created by installation, pipework layout or application.

Water Pressure (Bar)	Top outlet (Litres/minute) ■	Bottom outlet (Litres/minute)
1.0	10.0	10.0
1.5	14.0	14.0
2.0	18.0	18.0
2.5	20.0	20.0
3.0	22.0	22.0

Note: The flow rates remain constant when the top and bottom outlets are operating simultaneously.

LEFROY BROOKS